


Penetreringssond I8522

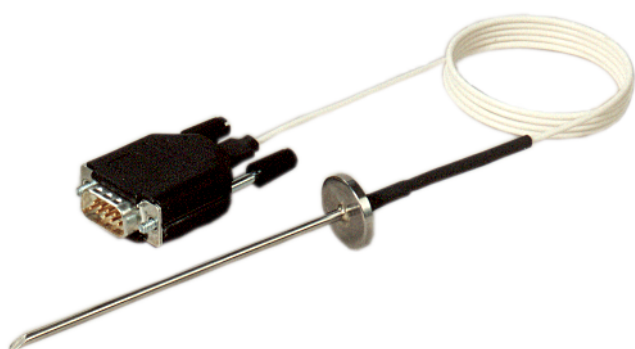


Penetreringssond för temperaturmätning med Mätman Combi. NTC-givare -35°/+140°C med 1 m kabel.

Vid leverans är givarhuvudet kalibrerat och justerat. Detta kan också göras av användaren med hjälp av mjukvaran **Mätman XL**. Justeringen lagras i givarhuvudet.

Tekniska data, penetreringssond I8522

Mätområde:	-35°/+140°C
Upplösning:	0,1°C vid -35°/+70°C 0,5°C vid +71°/+140°C
Mätnoggrannhet:	±1°C vid -35°/+70°C ±2°C vid +71°/+140°C
Material:	rostfritt stål SS 2333
Mått, sond:	Ø3 x 100 mm + 1 m kabel

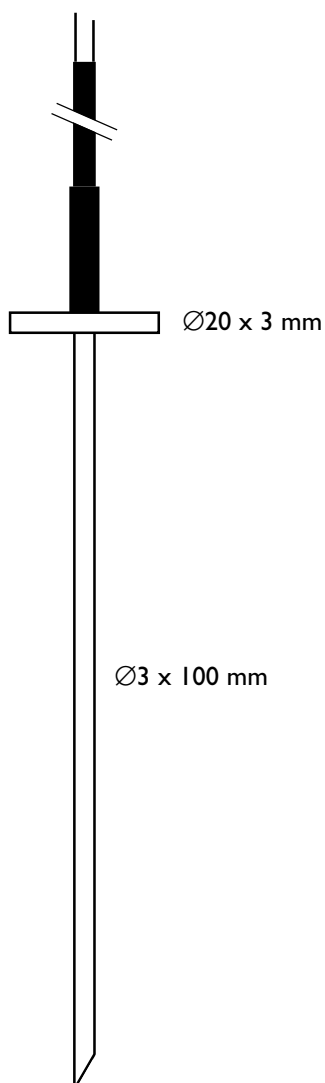

Andra tillbehör till Mätman Combi

I8520	Temperaturgivare -35°/+70°C
I8521	Temperaturgivare -35°/+140°C med 1 m kabel
I8540	0–10 V/0–20 mA
I8550	Spänning 0–2 V AC
I8551	Strömtånggivare 0–200 A
I8552	Nätspänningsgivare för 230 V AC
3972	Mätpropphuv E27 för 0–25 A
3973	Mätpropphuv E33 för 0–63 A

ELTEX
OF SWEDEN




ELTEX OF SWEDEN AB • BOX 608 • 343 24 ÄLMHULT • TEL 0476-488 00 • FAX 0476-134 00

E-POST: public@eltex.se • INTERNET: www.eltex.se

2000-11-23/Man-I8522.p65/EH-0240-00/Komp 7930

Penetration sensor 18522

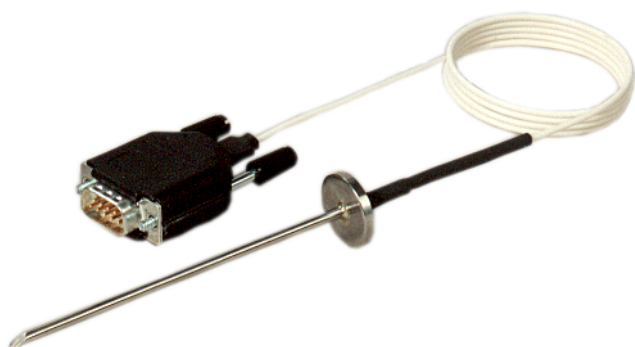


Penetration sensor for temperature measurement together with Mätman Combi. NTC sensor -35/+140°C with 1 m cable.

On delivery the sensor head is calibrated and adjusted. This can also be carried out by the user through the software **Mätman XL**. The adjustment is stored in the sensor head.

Technical data, penetration sensor 18522

Measuring range:	-35/+140°C
Resolution:	0.1°C within -35°/+70°C 0.5°C within +71°/+140°C
Accuracy:	±1°C within -35°/+70°C ±2°C within +71°/+140°C
Material:	stainless steel SS 2333
Size:	Ø3 x 100 mm + 1 m cable

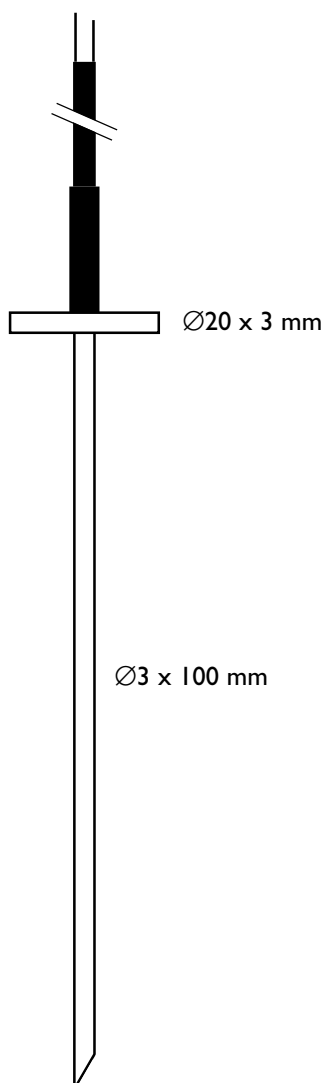

Other sensors for Mätman Combi

18520	Temperature sensor -35/+70°C
18521	Temperature sensor -35/+140°C with 1 m cable
18540	0–10 V/0–20 mA
18550	Voltage 0–2 V AC
18551	Clip-on current sensor 0–200 A
18552	Net voltage sensor for 230 V AC

ELTEX
OF SWEDEN

